



Single Output Industrial DIN RAIL

MODEL	XDR-12U240	XDR-24U240	XDR-48U240
OUTPUT VOLTAGE	12V	24V	48V
CURRENT RANGE	0-16 A	0-10 A	0-5A

R:Redundancy and DC_OK K:DC_OK Only
R&K Refer to: Naming Convention

SELV

INPUT

INPUT VOLTAGE	90~264Vac 127~370Vdc (Refer to the derating curve of "Loading and Input voltage")
POWER FACTORY	0.95
FREQUENCY RANGE	47~63Hz
EFFICIENCY	93.5%@12V 94.5%@24V 95%@48V
AC INPUT CURRENT	≤3A@115Vac ≤1.5A@230Vac
AC INRUSH CURRENT	23A@115Vac 45A@230Vac
LEAKAGE CURRENT	≤ 0.5mA/240Vac

PROTECTION

OVER LOAD	130%-160% rated power, Protection Mode: Hiccup mode, recovers automatically after fault condition is removed
SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	Protection Mode: Shunt down, recovers after repower on
OVER TEMPERATURE	Protection Mode: Shunt down, recovers after temperature drop

ENVIRONMENT

OPERATING TEMPERATURE	-30°C~+70°C (Refer to the derating curve of "Loading and Ambient temperature")
OPERATING HUMIDITY	20~90%RH non-condensing
STORAGE TEMP., HUMIDITY	-40°C~+85°C 10%~95%RH

WEIGHT & PACKING

MTBF	≥300Khrs.MIL-HDBK-217F(25°C)
PRODUCT DIMENSION	30x125.1x110mm(L*W*H)
NET WEIGHT	0.6KG
QUANTITY/CARTON	24PCS
GROSS WEIGHT	15.4KG

Features:

- Universal AC input 90~264Vac
- Built-in active PFC function
- High efficiency up to 95%, low leakage current <0.5mA/240VAC
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Can be installed on DIN rail TS-35/7.5 or 15
- The body width is only 30mm
- 100% full load burn-in test
- LED indicator for power on
- DC OK relay contact(Optional)
- Redundancy function(Optional)
- High reliability
- 3 years warranty
- Compliance to IEC/EN/UL 62368-1

OUTPUT


DC OUTPUT	12V	24V	48V
OUTPUT CURRENT	16A	10A	5A
RATED POWER	192W	240W	240W
VOLTAGE TOLERANCE	±1%	±1%	±1%
VOLTAGE ADJ.RANG	12~14V	24~28V	48~55V
RIPPLE NOISE	150mV P-P(Max.)	150mV P-P(Max.)	200mV P-P(Max.)
HOLD UP TIME(Typ.)	14mS/230Vac 14mS/115Vac		

SAFETY & EMC


SAFTY	UL62368-1, EN62368-1, GB4943.1
WITHSTAND VOLTAGE	I/P-O/P:3KVac; I/P-FG:2KVac; O/P-FG:0.5KVac
ISOLATION	100M Ohms/500Vdc/25°C/70%RH

	Parameter	Standard	Test Label/Note
EMI	Conducted emission	BS EN/EN55032(CISPR32), FCC PART 15/CISPR22, GB9254.1	Class B
	Radiated emission	BS EN/EN55032(CISPR32), FCC PART 15/CISPR22, GB9254.1	Class B
	Harmonic current	BS EN/EN61000-3-2, GB17625.1	Class A
	Voltage flicker	BS EN/EN61000-3-3	-----
EMS	BS EN/EN55035		
	Parameter	Standard	Test Label/Note
	ESD	BS EN/EN61000-4-2	Level 4, 15KV air, Level 2, 8KV contact, criteria A
	RF field susceptibility	BS EN/EN61000-4-3	Level 3, 10V/m, criteria A
	EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV/5KHz, criteria A
	Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/L-N, 2KV/L/N-FG criteria A
	Conducted susceptibility	BS EN/EN61000-4-6	Level 3, 10V, criteria A
	Magnetic field immunity	BS EN/EN61000-4-8	Level 4, 30A/m, criteria A
Voltage dips and interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	

LOADING AND AMBIENT TEMPERATURE

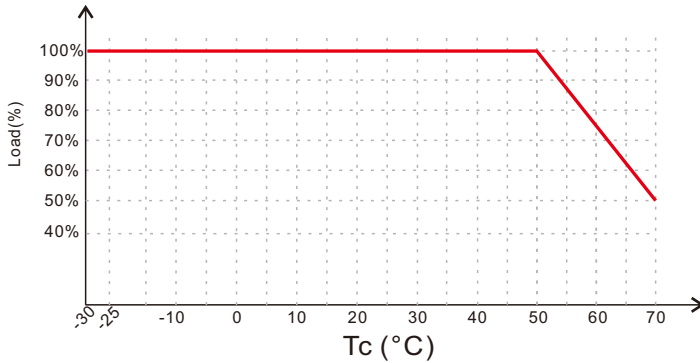

LOADING AND INPUT VOLTAGE

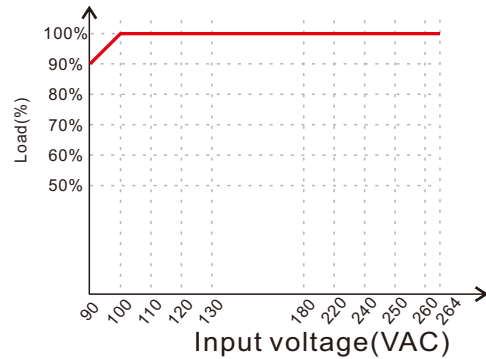



INSTALLATION GUIDE

Product is for indoor use.

- The power supply must be grounded before installation and power on.
 - Short circuit or overload will cause power supply protection, resulting in abnormal operation of the load (LED, instrument equipment, etc.).
 - Maintaining good ventilation and heat dissipation is crucial to the lifespan of the power supply. Do not install the product in a sealed high-temperature environment or near flammable and explosive materials. Do not block the power supply vent with foreign objects.
 - The connection line between the power supply and the load should be as short as possible. A connection line that is too long or too thin will cause a voltage drop on the line, resulting in insufficient LED brightness, uneven lighting, etc.
 - The product has low voltage and high current. Be sure to tighten the terminals during installation to avoid heat caused by poor contact.
- When installing the product, try to stay away from environments with relatively high temperatures.

PRODUCT DIMENSIONS

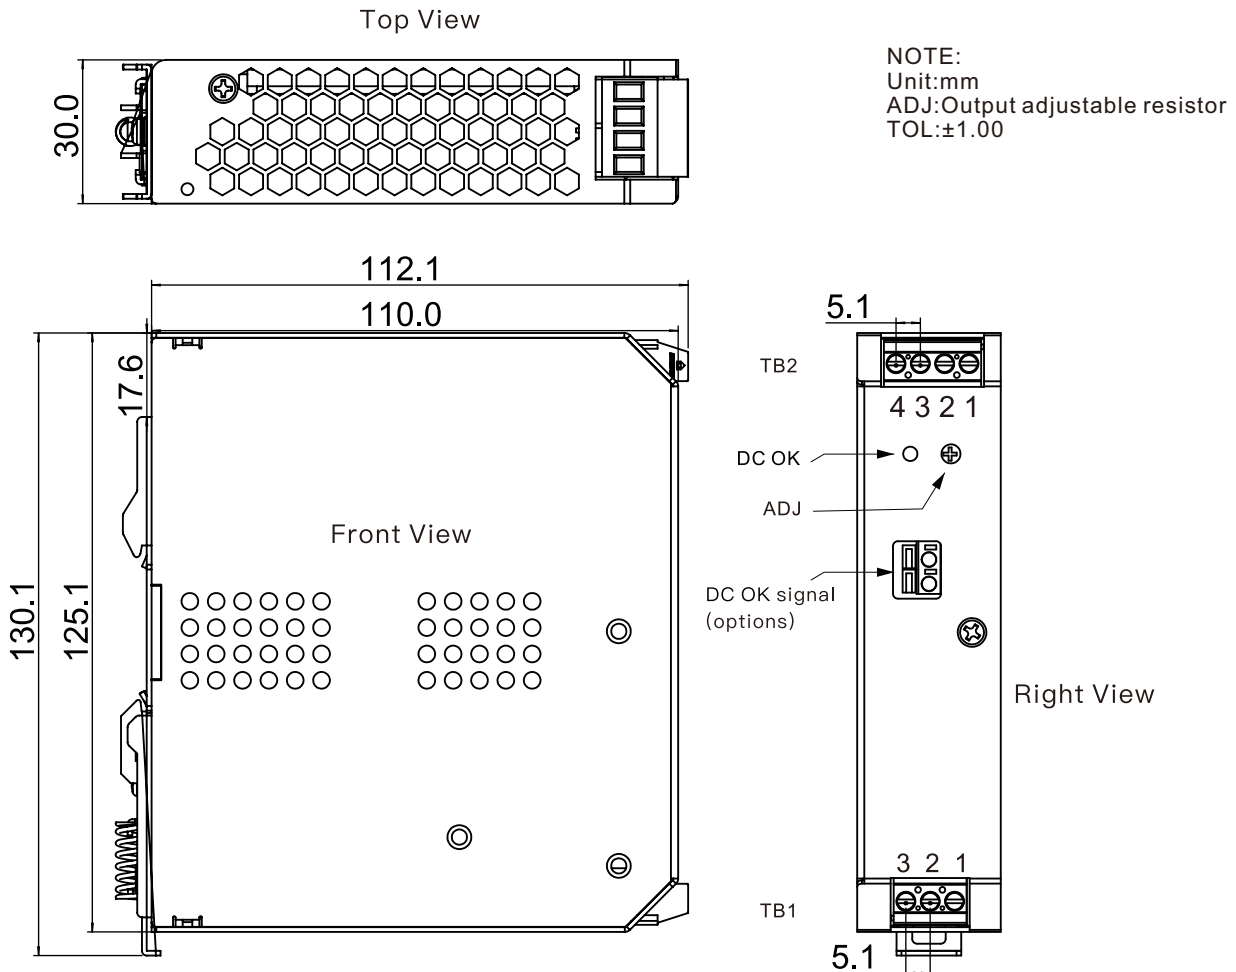

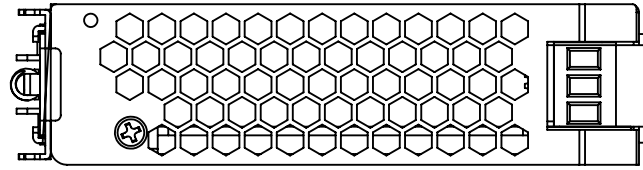

Bottom View

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment


TB1		TB2	
Pin No.	Assignment	Pin No.	Assignment
1	AC/L	1,2	DC output -V
2	AC/N	3,4	DC output +V
3	FG		

DC OK Relay Contact(Options)


Contact closure	Power on/DC ok
Contact open	Power off/DC fail
Contact specifications (max.)	30V/1A Resistive load

Redundancy function(Options)

- 1, Built in redundancy function, capable of parallel connection of 2 single machines
- 2, When running in parallel, the maximum load should not exceed the rated power of any one power source

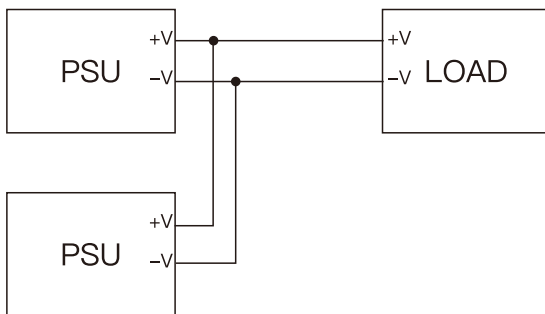

NAMING CONVENTION

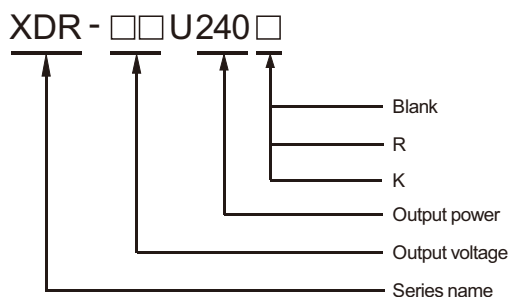

MODEL	FUNCTION	REMARKS
Blank	Enclosed	Standard
R	Built-in DC OK and Redundancy	Optional
K	DC OK Only, No Redundancy	Optional