

DL2-30-U series

30W Constant Voltage class II plastic case DIN-Rail Power Supply



■ Features:

- Universal AC input / Full range: 85 – 264VAC and 120 – 370VDC
 - High Dielectric Strength: IN/OUT up to 4000VAC
 - Protections: Over current / Short circuit / Over Voltage
- Wide operating ambient temperature range: -40°C ÷ +70°C
- Over-voltage category OVC III (designed to meet EN61558-1)
 - Low no load power consumption
 - Isolation class II design
- Designed to install on TS35x7.5/TS35x15 Din Rail



MODEL NUMBERING

DL2	-	30	-	X	-	U
SERIES		RATED OUTPUT POWER		RATED OUTPUT VOLTAGE		INPUT VOLTAGE RANGE
DIN RAIL. PLASTIC CASE, CLASS II POWER SUPPLY, CONSTANT VOLTAGE DESIGN		30 MEANS 30W (NOT FOR ALL VOLTAGE VERSIONS, PLEASE CHECK DETAILS IN BELOW SPECIFICATION — OUTPUT SECTION)		X = 05	5V	U means 85~264VAC / 120~370VDC
				X = 12	12V	
				X = 15	15V	
				X = 24	24V	
				X = 48	48V	

ELECTRICAL SPECIFICATION

MODEL	DL2-30-05-U	DL2-30-12-U	DL2-30-15-U	DL2-30-24-U	DL2-30-48-U
OUTPUT					
RATED VOLTAGE	5V	12V	15V	24V	48V
RATED CURRENT	3.0A	2.0A	2.0A	1.5A	0.75A
ADJUSTABLE VOLTAGE RANGE (MIN.)	4.9V ÷ 5.5V	10.8V ÷ 13.8V	13.5V ÷ 18.0V	21.6V ÷ 29V	43.2V ÷ 55.2V
RATED POWER	15W	24W	30W	36W	36W
LINE REGULATION	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%
LOAD REGULATION	± 1.5%	± 1.5%	± 1.5%	± 1.5%	± 1.5%
RIPPLE & NOISE (MAX.) [2]	80mV _{p-p}	120mV _{p-p}	120mV _{p-p}	150mV _{p-p}	240mV _{p-p}
SETUP TIME, HOLD UP TIME (TYP.)	3000ms, 60ms / 230VAC at full load; 3000ms, 12ms / 115VAC at full load				
CAPACITIVE LOAD (MAX.)	12000μF	6000μF	5000μF	1400μF	600μF
INPUT					
VOLTAGE RANGE	85 ÷ 264VAC				
	120 ÷ 370VDC				
FREQUENCY RANGE	47 ÷ 63Hz				
EFFICIENCY (TYP.)	82%	88%	89%	88%	90%
AC CURRENT (MAX.)	0.5A / 230VAC; 0.9A / 115VAC				
INRUSH CURRENT (TYP.)	45A / 230VAC; 25A / 115VAC				

DL2-30-U series

30W Constant Voltage class II plastic case DIN-Rail Power Supply



PROTECTIONS

OVER CURRENT	Range: above 120% rated current				
	Type: auto-recovery				
SHORT CIRCUIT	Type: hiccup mode, auto-recovery.				
OVER VOLTAGE	≤ 7.5VDC	≤ 16VDC	≤ 20VDC	≤ 36VDC	≤ 60VDC
	Type: hiccup mode or output voltage clamp				

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ 70°C (Refer to Derating Curve)
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 10 ÷ 95% RH non-condensing
TEMPERATURE COEFFICIENT (TYP.)	± 0.02% / °C
OPERATING ALTITUDE (MAX.)	2000m

SAFETY AND EMC REGULATIONS

SAFETY STANDARDS	Compliance to EN62368-1; Designed to meet EN61558-1
WITHSTAND VOLTAGE	IN/OUT: 4000VAC (< 5mA / 1min)
EMC EMISSION	Compliance to EN55032
EMC IMMUNITY	Compliance to: EN55035; EN61000-4-2, -3, -4, -5, -6, -11
HARMONIC CURRENT	Compliance to: EN61000-3-2 class A, EN61000-3-3

OTHERS

MTBF (MIN.)	300 000h / 25°C per MIL-HDBK-217F
DIMENSIONS	92.66 x 35.00 x 58.00mm (L x W x H)
CASE MATERIAL	Black plastic heat-resistant (UL94V-0)
NET WEIGHT	0.06kg


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load, 25°C of ambient temperature and humidity <75% RH.
2. Ripple & noise is measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC Directives.
4. Specifications are subject to change without prior notice.

DL2-30-U series


30W Constant Voltage class II plastic case DIN-Rail Power Supply



DERATING CURVE


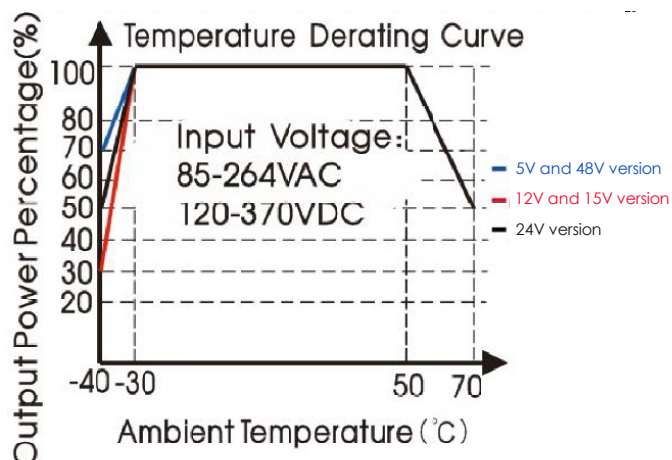


STATIC CHARACTERISTIC

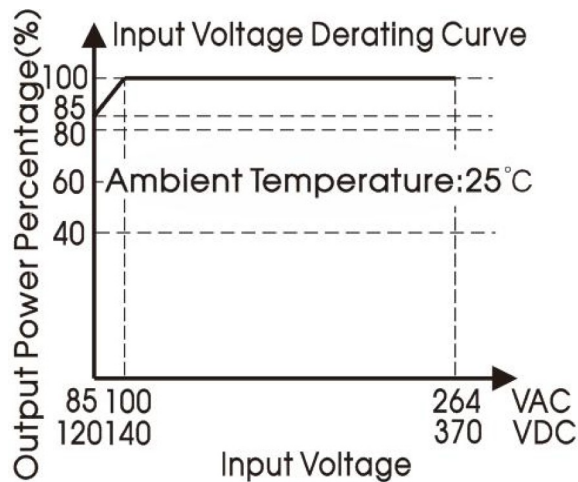

MECHANICAL SPECIFICATION

THIRD ANGLE PROJECTION

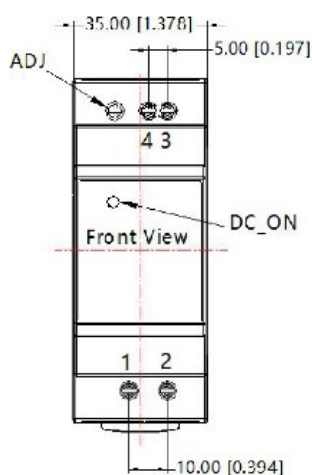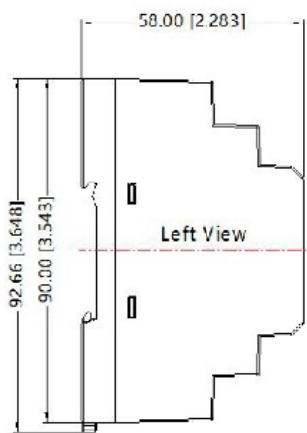

Pin-Out	
Pin	DL2-30-U
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:
Unit: mm[inch]
ADJ: adjustable resistance to change output voltage
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
Mounting rail: TS35
General tolerances: $\pm 1.00[\pm 0.039]$